

Painless URI dereferencing using The DataTank




Pieter Colpaert, Ruben Verborgh, Erik Mannens, Rik Van de Walle
{firstname.surname}@ugent.be
Ghent University – iMinds – Multimedia Lab

Tired of implementing the Linked Data Principles over and over again?

`<http://triples.demo.thedatatank.com/NMBS/90>`


`rdf:type`

`transit:Stop .`

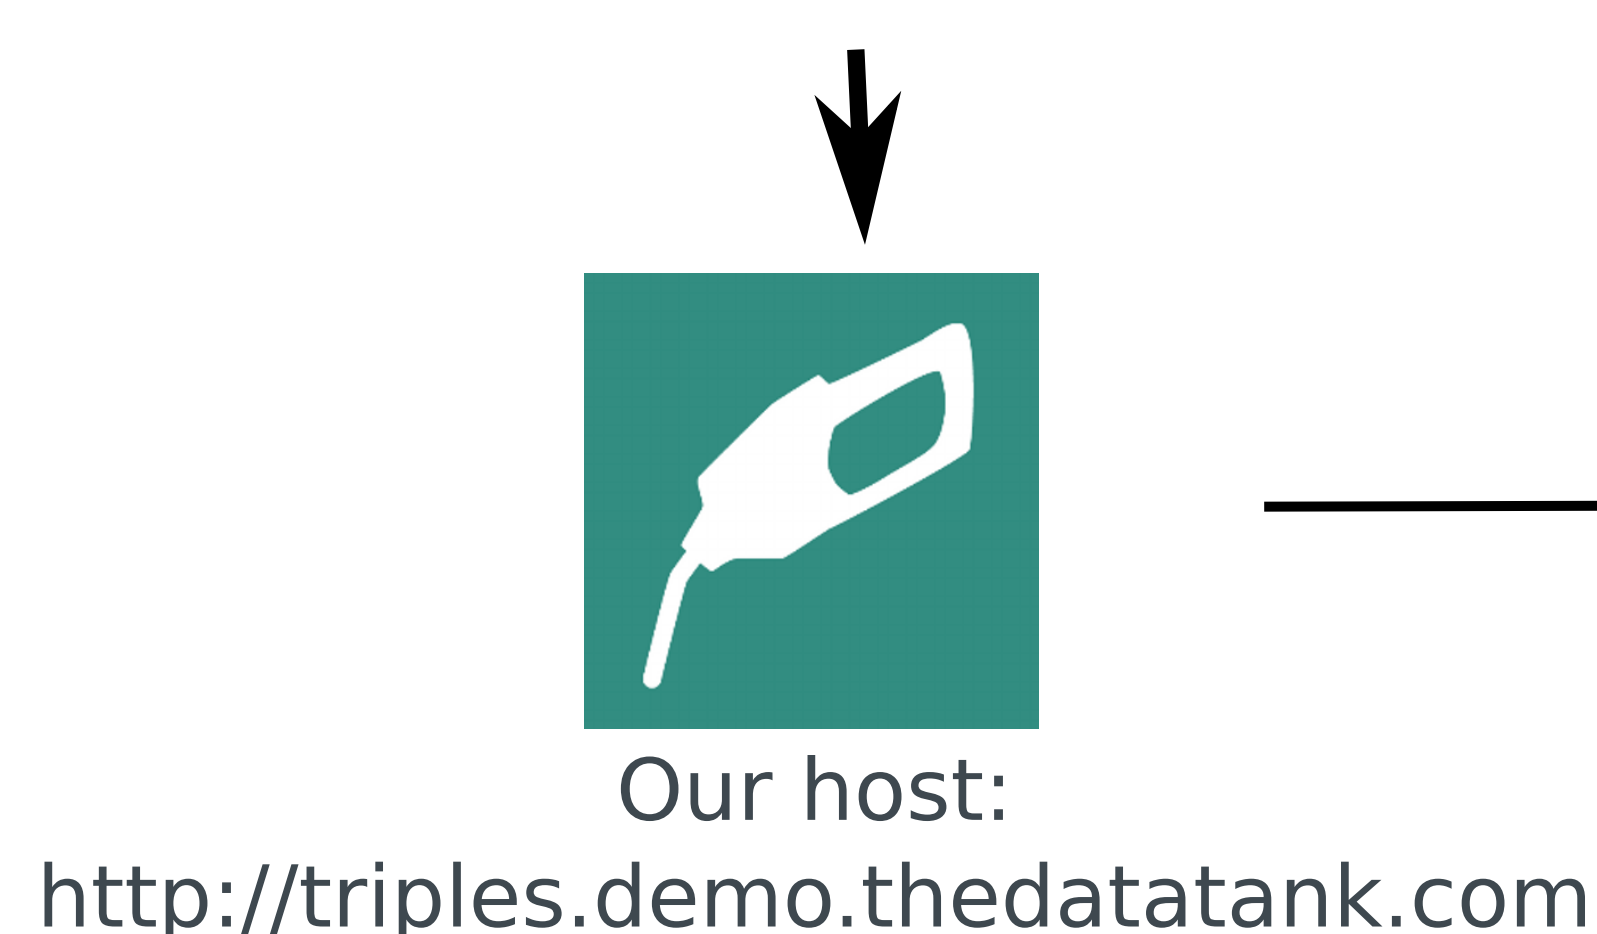


text/html

Other Content-Types

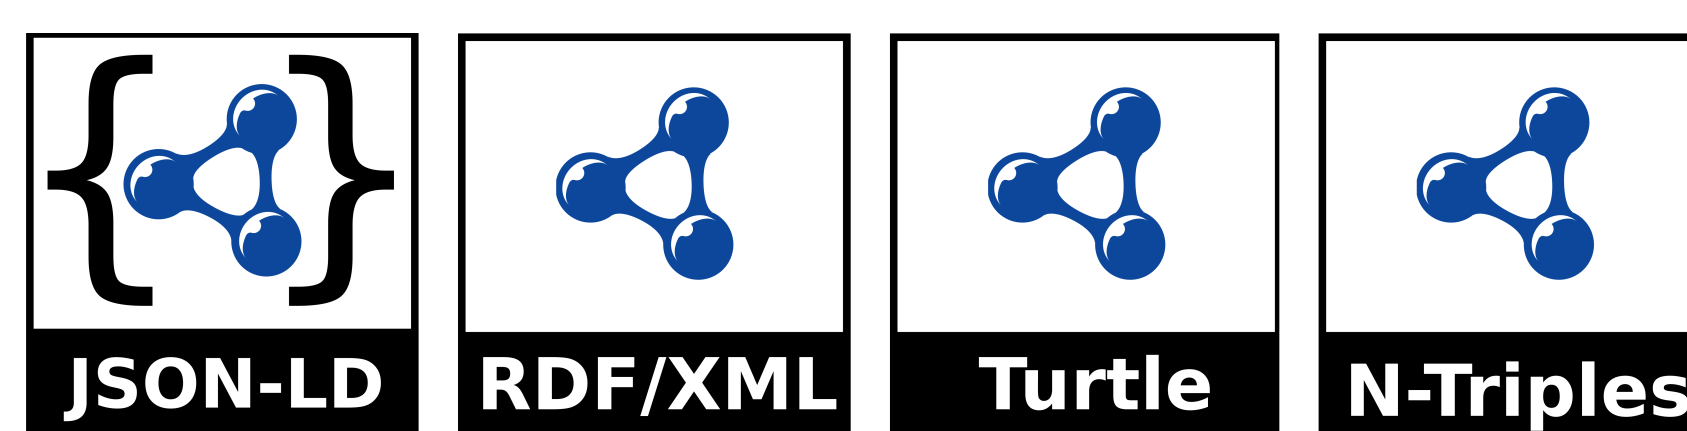

Create your own RDF2HTML plugin

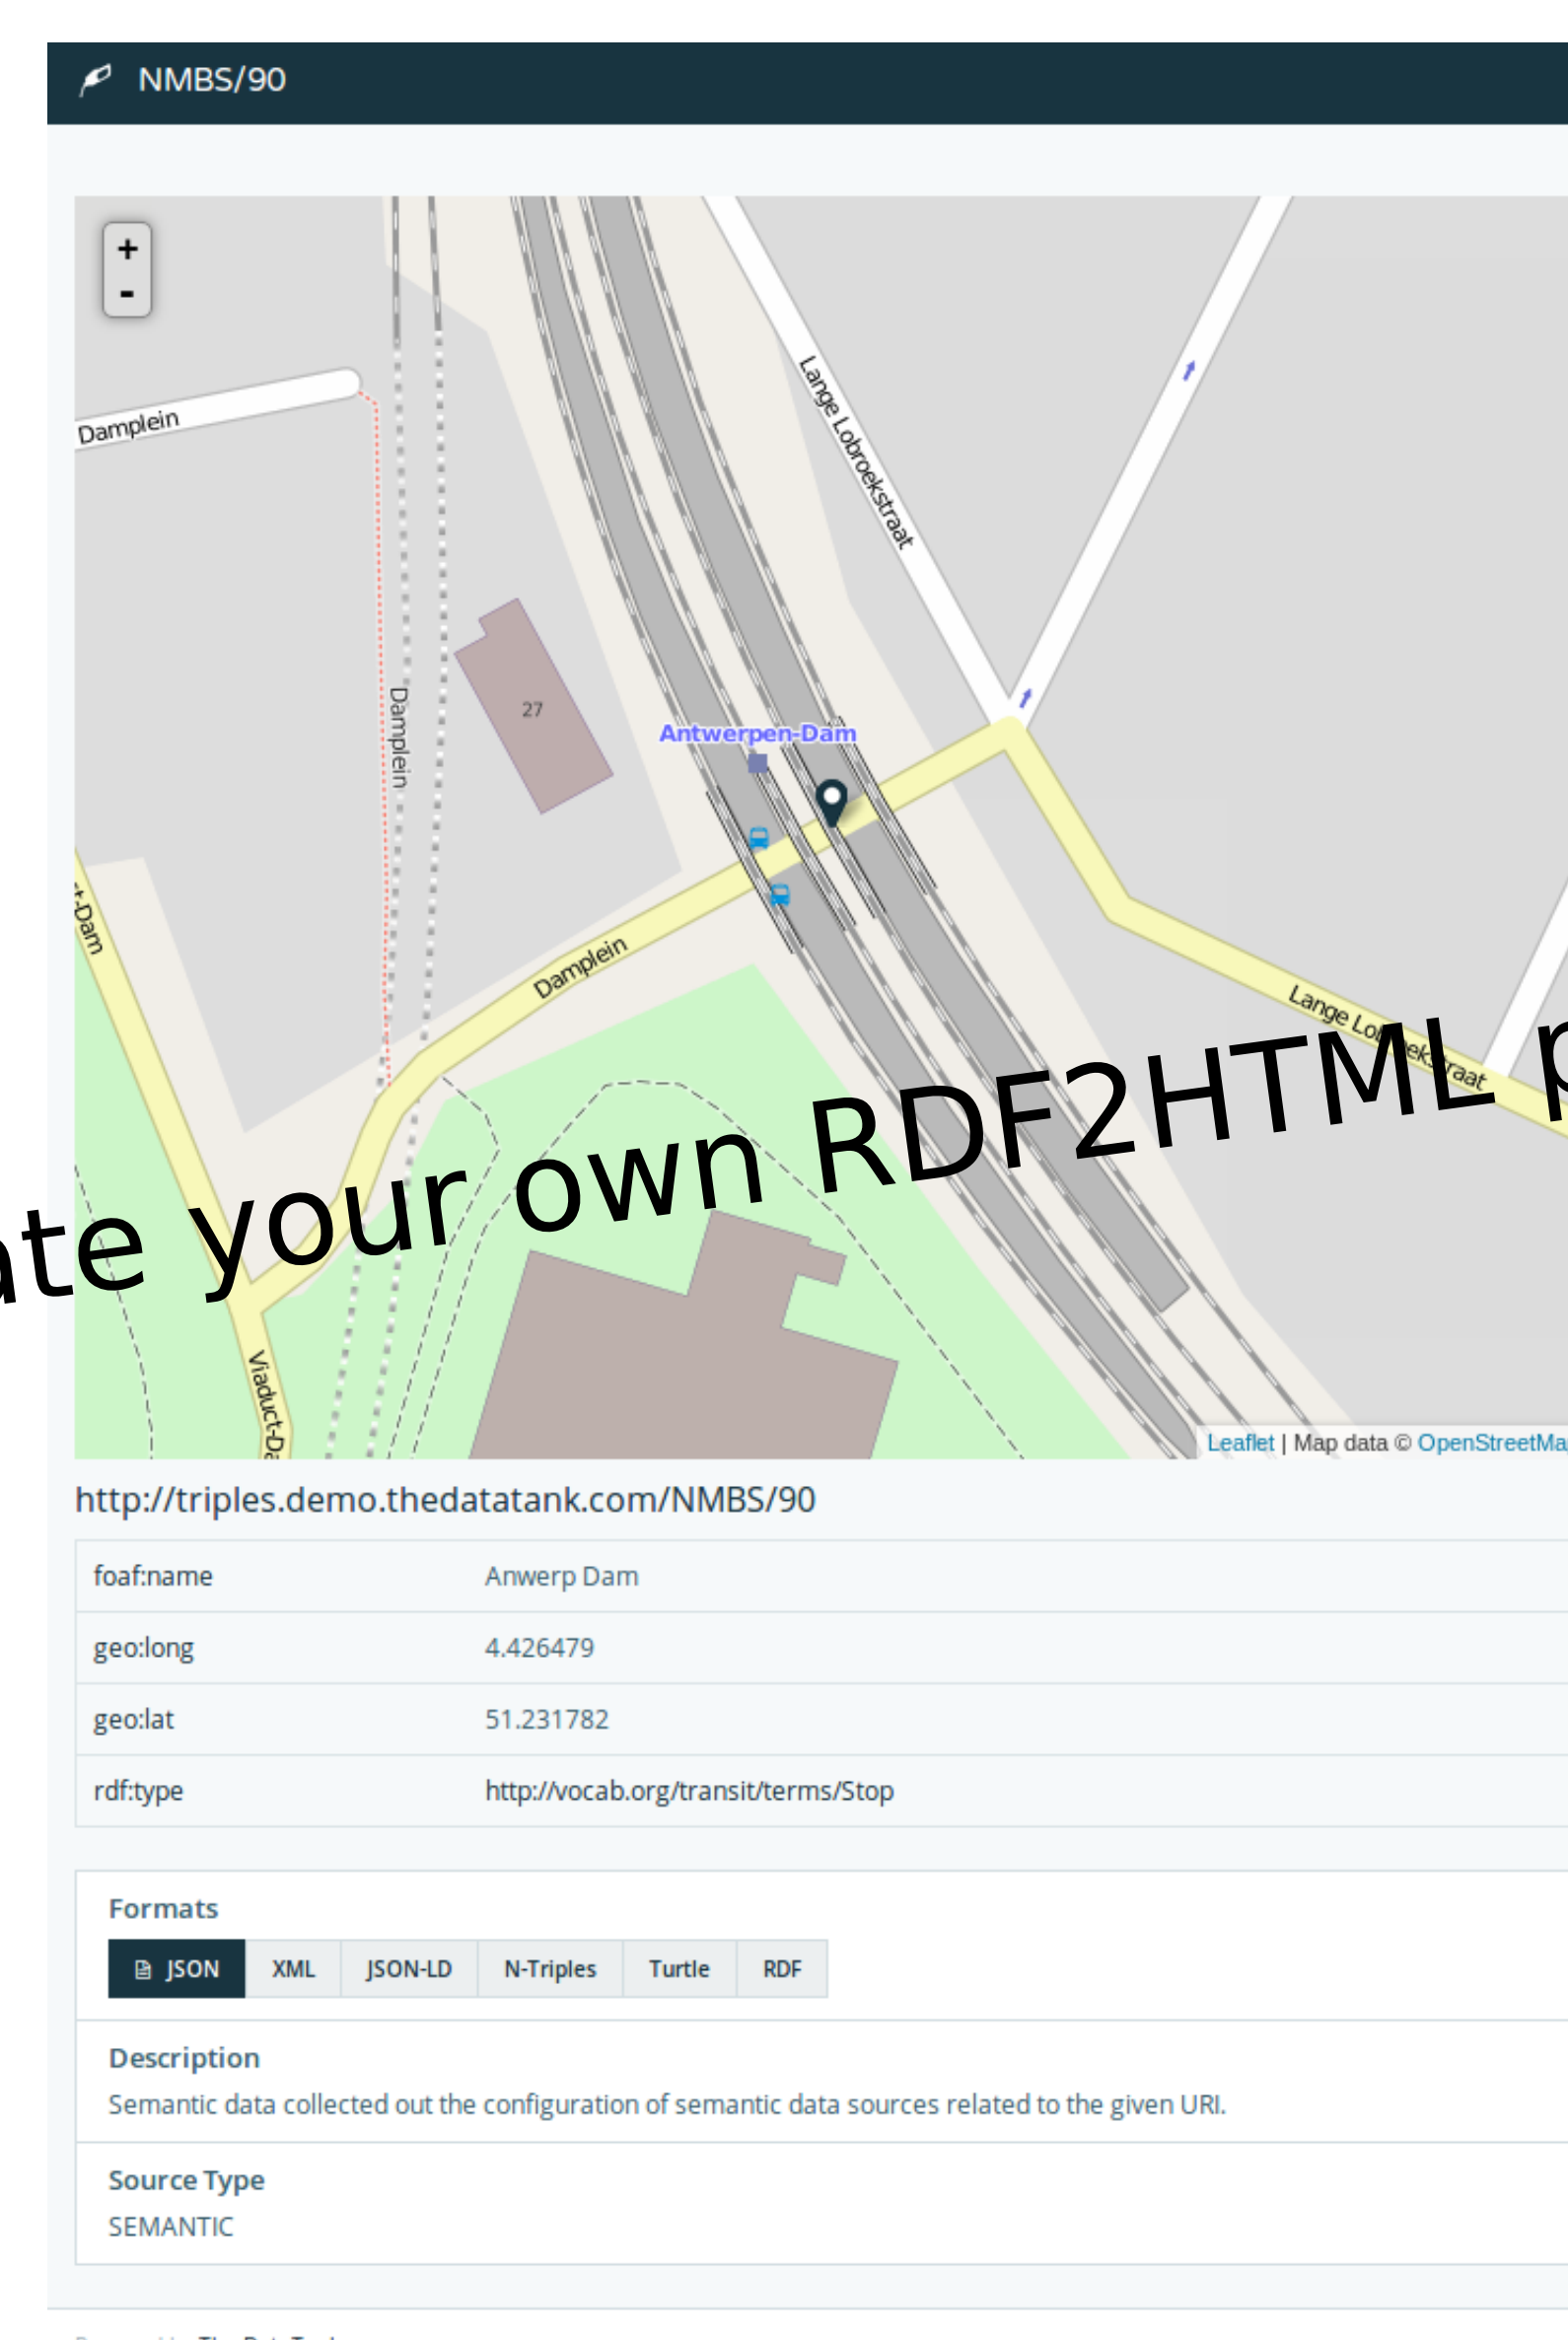

Configure sources using the API

```
$ curl -XPOST http://triples.demo.thedatatank.com/api/triples --anyauth -u admin -d '{
  "type": "Turtle",
  "URI": "http://triples.demo.thedatatank.com/demo.ttl"
}'
```

→ or "Sparql", "LDF"...

NEW

Query the data used to dereference the URIs using Linked Data Fragments at <http://triples.demo.thedatatank.com/query>

Set it up in less than 10 minutes at <http://docs.thedatatank.com>